


Interactive Display™

Turn your plasma screen into an interactive experience by simply attaching the Interactive Display (ID) touch-screen overlay onto the front of your plasma screen. Set-up and PC connection through the USB port is fast and easy, and no power supply is required. Touch the screen and experience the immediacy and excitement of navigating any windows program with speed and accuracy while staying in front of your audience. The ID utilizes state-of-the-art resistive membrane technology, providing high contrast picture quality, fast data transfer speed and an excellent viewing angle, while protecting the plasma surface and your investment.

Adding a Touch of Class to Every Presentation

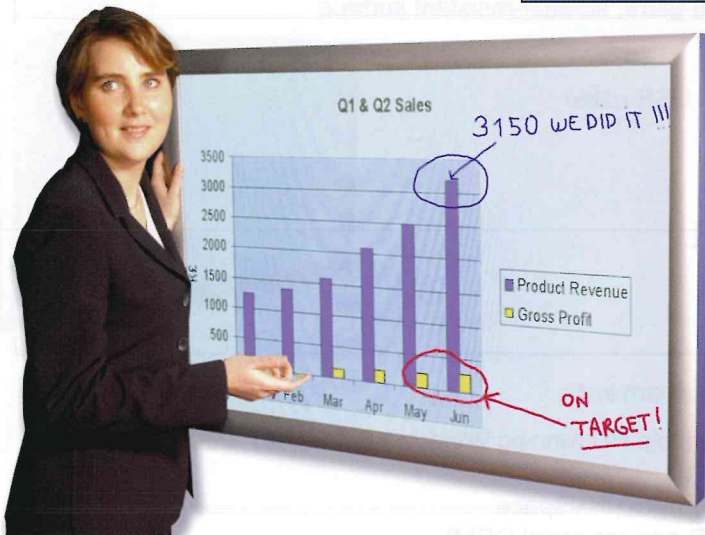

The ID was designed for the average Windows user who wants to benefit from interactive presentation technology without the hours of learning and preparation time associated with other interactive presentation systems. **Annotate Live** software allows the user to quickly annotate, highlight and erase on top of any Windows screen. Plus, the ID comes with whiteboard software to permit note-taking or drawing with all the annotations saved automatically for easy data sharing and retrieval. Software upgrades are available to achieve greater functionality by utilizing user-definable function keys.

ID Product Features

- **Bright color-rich picture**
Less than 10% light loss with excellent viewing angle.
- **Anti-glare protective coating**
Ideal in most ambient environments with scratch resistant screen surface.
- **Durable construction**
Made from the highest quality materials, giving a robust finish.
- **Simple to install and set-up**
No special skills or training required, connects to PC usb port.
- **Touch and navigate**
Move through Windows applications, point and click, even emulates right mouse button.
- **Compatible with most plasma displays**
Vendors including Eizo, Fujitsu, NEC, Panasonic, Pioneer and Sony.
- **Maintain infrared control of plasma screen**
Designed to ensure infrared sensor is not obstructed by the overlay.



Specifications

Product	ID42	ID50	ID60
Overall size (mm)	1180(W) x 770(H) x 70(D)	1366(W) x 876(H) x 70(D)	1610(W) x 1020(H) x 70(D)
Active area (mm)	930(W) x 523(H)	1107(W) x 632(H)	1328(W) x 747(H)
Weight	21.5 Kg	28.1 Kg	36 Kg
Shipping size (mm)	1610(W) x 860(H) x 250(D)	1610(W) x 960(H) x 250(D)	1830(W) x 1110(H) x 250(D)
Shipping weight	31.5 Kg	38.2 Kg	45.2 Kg

Construction	Aluminum and laminated
Bezel color	Silver gray
Viewing angle	160 degrees
Aspect ratio	16:9
Optical specification	High transparent overlay with anti-glare, scratch-resistant surface
Operating voltage	N/A
Power supply	None required—power drawn via USB cable
Communications	USB
Touch membrane	Resistive
Touch durability	1 million touches at any one point
Operating temperature	Ambient
Warranty	One year



Ideal for...

- Presentations and business review
- Education and training
- Video conferencing and collaboration
- Exhibitions and conferences
- Military and government briefings
- Process control and plant monitoring
- Customer retail sites
- Passenger terminals
- Gaming and entertainment

System Requirements

- IBM compatible PC running Windows 95, 98, NT, 2000, Me and XP
- 64 MB RAM
- 10 MB free hard disk space
- Spare USB port (or serial COM)
- PS/2 mouse/keyboard port

ID Carton Contents

- Interactive Display overlay
- Mounting kit (including support brackets, bracket screws, hand knob screws, connecting screws and assembly tool)
- Installation and driver CD Rom
- Operator's manual
- USB controller (or serial controller if requested at time of order)
- 5 meter USB cable (or serial cable if requested at time of order)



**Interactive Products Division —
Numonics Corporation**

101 Commerce Drive • Box 1005
 Montgomeryville, PA 18936
 Phone: (215) 362-2766 • Fax: (215) 361-0167
 Email: numonics@numonics.com
 Web: www.interactivewhiteboards.com